


TO, CZEGO POTRZEBUJESZ
- NAJSZYBCIEJ, JAK TO MOŻLIWE

PROWENT
KOMINKI • WENTYLACJA



Suspension clamp with rubber gasket **SCP-B**

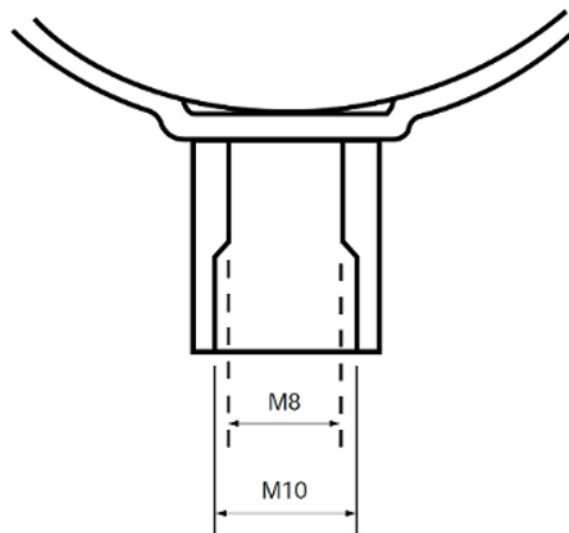

Suspension clamp is used for fixing and suspending SPIRO or flex air ducts. The element is made of two rounded profiles connected with each other by $\varnothing 6$ mm steel screws. A stable, rubber gasket with a wide flange effectively prevents the transmission of vibrations from the installation to the building structure. The self-locking connector and plastic gasket on the profile connection make it quick and easy to assemble. The locking screws have combi-head drive tips (Phillips/slotted). The clamp is mounted to the threaded rod through a M8 / M10 double threaded nut.

Technical Specification:

Material	: Zinc plated steel + rubber
Diameter range	: $\varnothing 80$ mm - $\varnothing 630$ mm
Clamp width	: 20 mm
Clamp thickness	: 2 mm
Locking screws	: $\varnothing 6$ mm / steel with combi-head drive tips (Phillips/slotted)
Double threaded nut	: M8/M10